

1
FIG.

NORMAL BLUETOOTH HOPPING PATTERN (HV1)

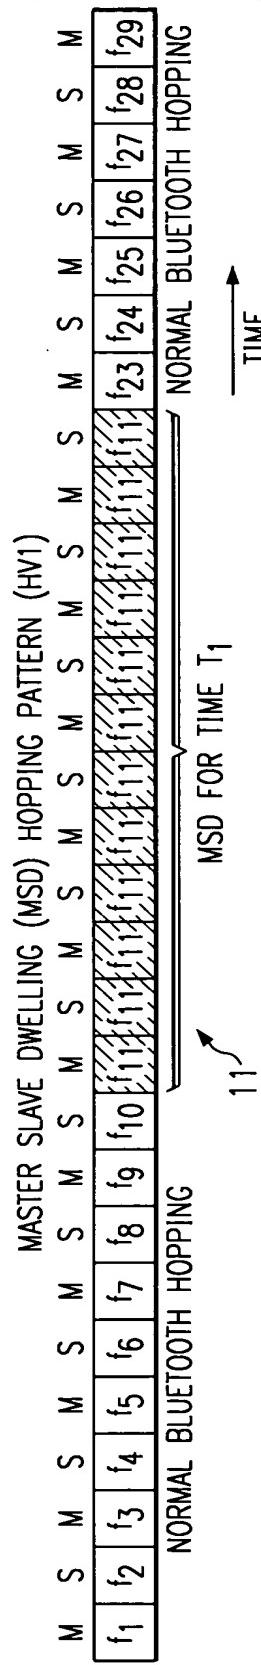


FIG. 2

NORMAL BLUE WITH HUFFING PATTERN USING RVI															
M	S	M	S	M	S	M	S	M	S	M	S	M	S	M	S
f1	f2	f3	f4	f5	f6	f7	f8	f9	f10	f11	f12	f13	f14	f15	f16
f17	f18	f19	f20	f21	f22	f23	f24	f25	f26	f27	f28	f29			

NORMAL BLUETOOTH HOPPING PATTERN USING HV1

FIG. 3

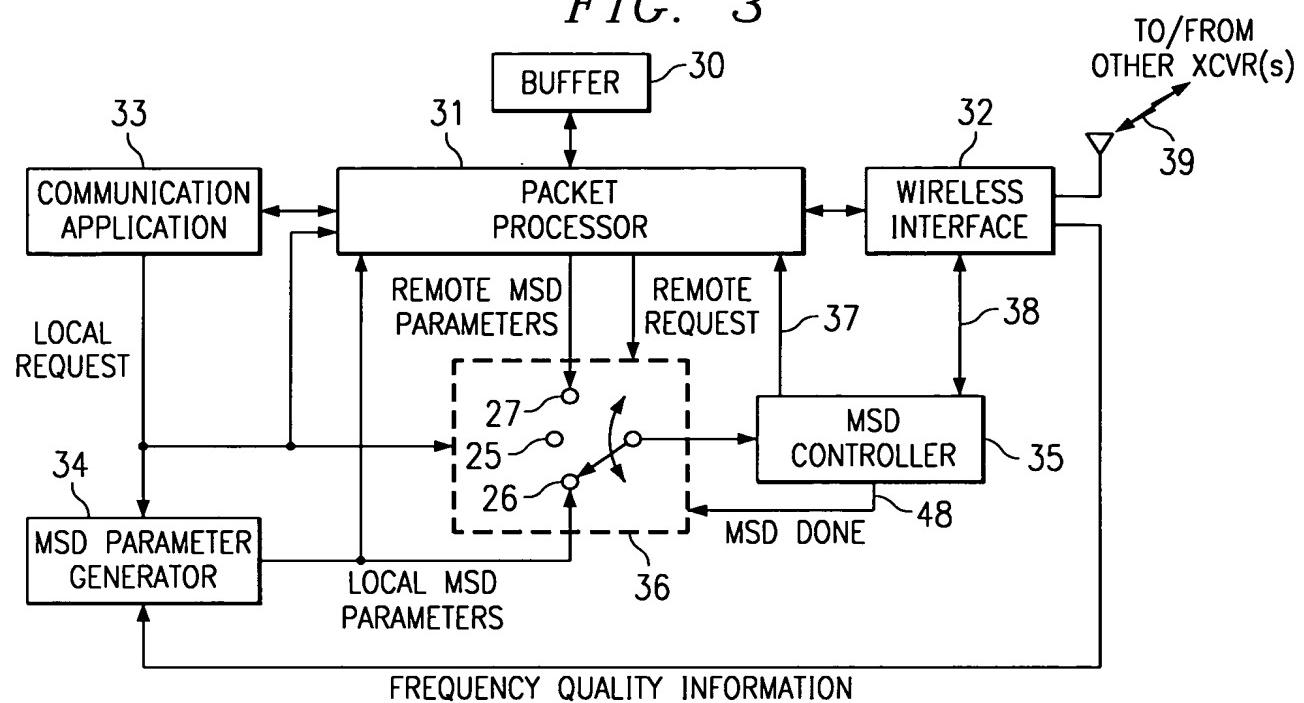


FIG. 4

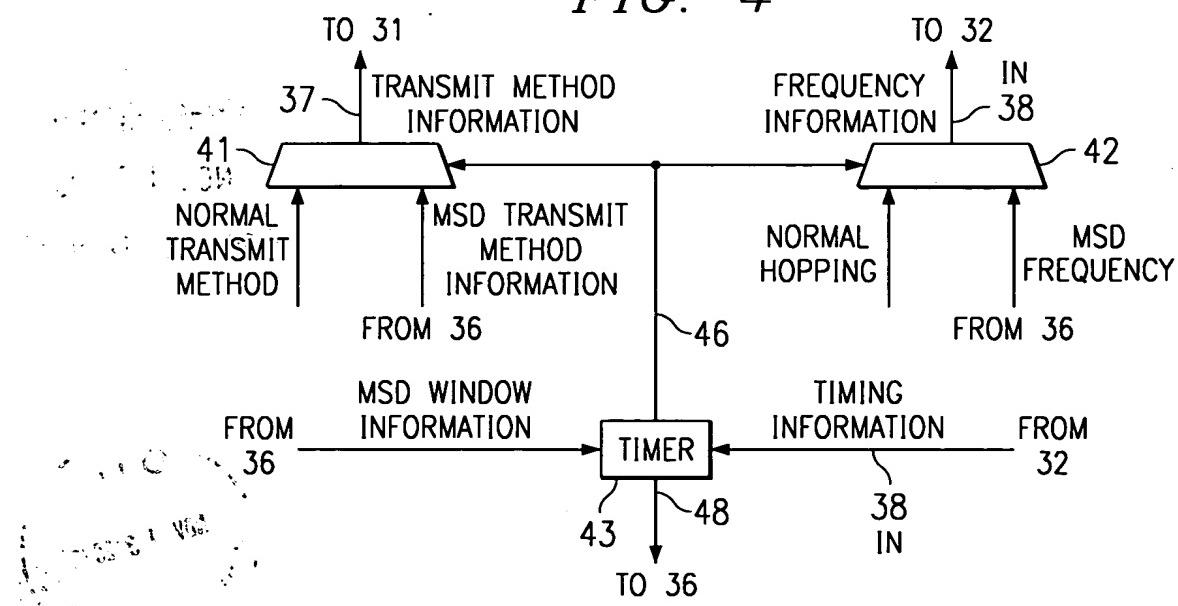
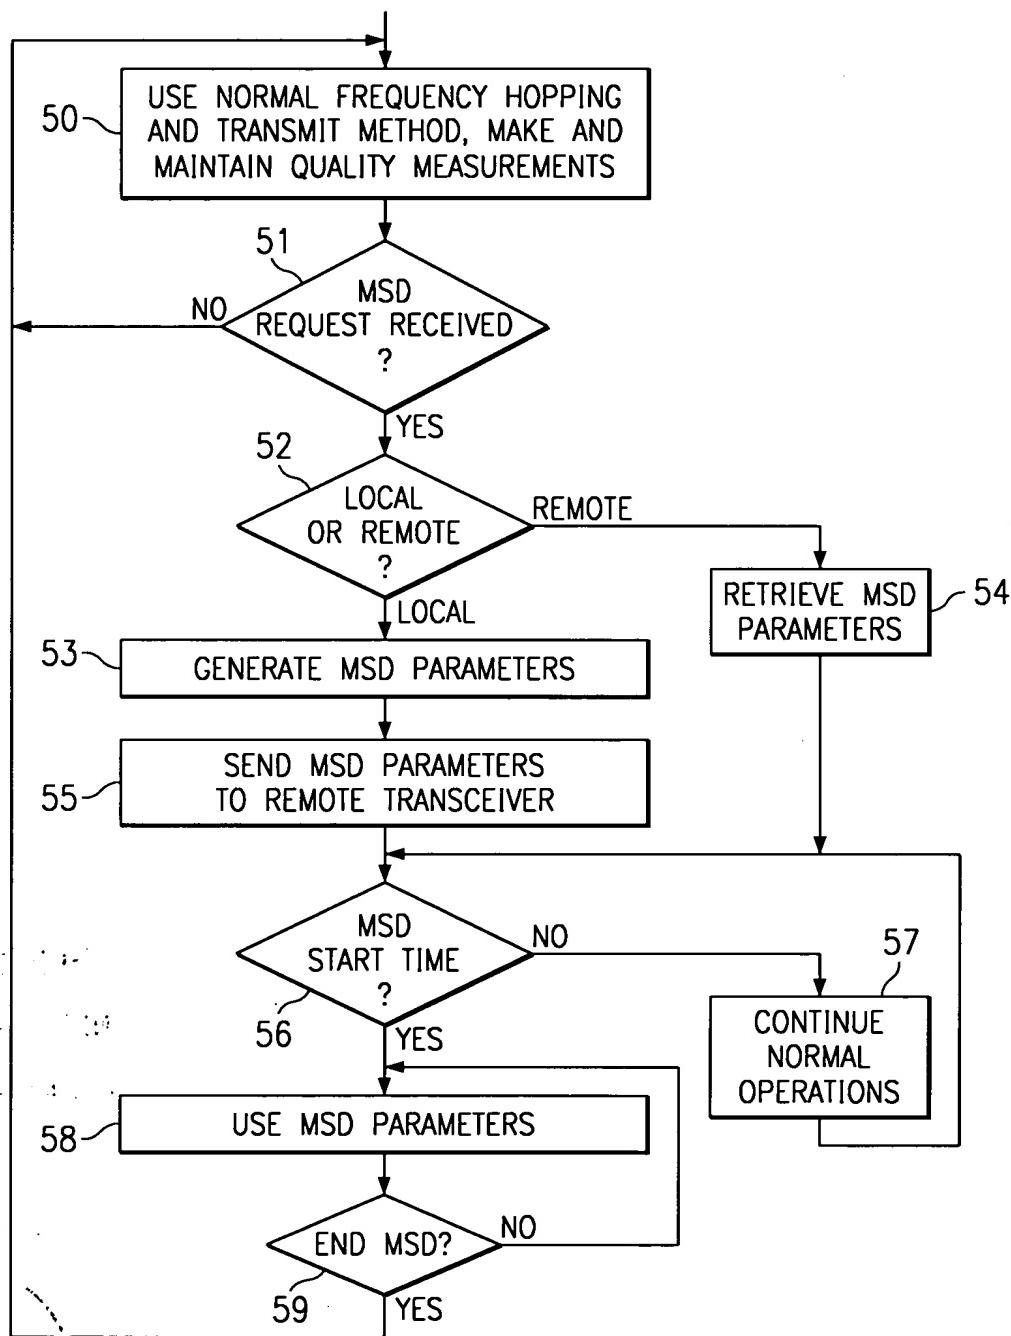


FIG. 5



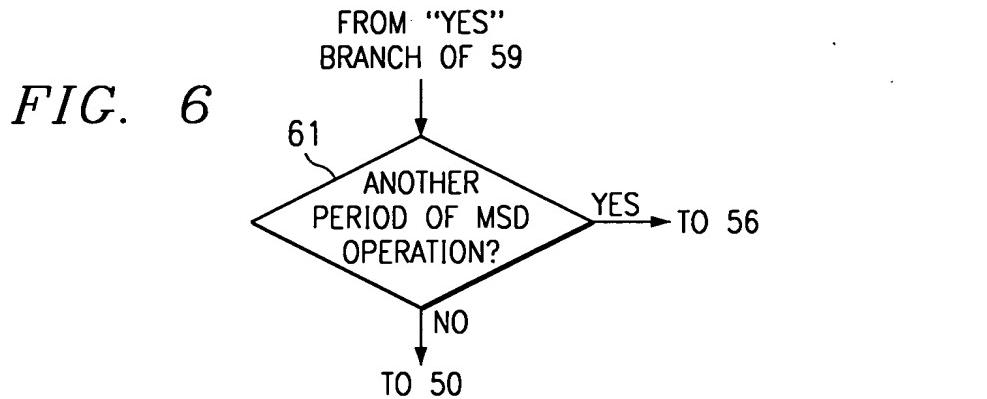


FIG. 7

REASON FOR MSD REQUEST	DATA TRANSMISSION METHOD	
	MSD	NON-MSD
LARGE DATA TRANSFER	DH5	DM3
	DH3	DM3
	DM5	DM3
ADDITIONAL COMMUNICATION ACTIVITY DESIRED	HV2	HV1
ENHANCED QoS DESIRED	SAME AS NON-MSD	SAME AS MSD
ENHANCED QoS DESIRED	LOWER CODING RATE	HIGHER CODING RATE

